

Alcatel OmniPCX Office

Alcatel 4018/4019


















Introduction

Thank you for choosing a telephone from the 4018/4019 range manufactured by Alcatel. Your terminal has a new ergonomic layout for more effective communication.



How to use this guide

-  Lift the receiver.
-  Hang up.
-  Numeric keypad.
-  Means that the function is subject to programming. If necessary, contact your installer.
-  Adjustment "reduce".
-  Adjustment "increase".
-  Loudspeaker, hands free.
-  Move the navigation key up or down.
-  To go back one level (press and release) or to return to the welcome page (press and hold) ; during a conversation, can be used to access the different pages and to return to the telephone screens.
-  Line key.
-  Specific key on numeric keypad.
-  Partial view of display.
-  Fixed key.
-  MENU key.
-  Voice mail access key.

These symbols can be supplemented by small icons or text.

Contents

1.

Getting to know your telephone p.6

Using your telephone p.7

- 1.1 Making a call p.7
- 1.2 Receiving a call p.7
- 1.3 Using the telephone in "Hands free" mode p.7
- 1.4 Activating the loudspeaker during a conversation (receiver lifted) p.7
- 1.5 Calling your correspondent by name (company directory) p.7
- 1.6 Make a call using the personal phone book p.8
- 1.7 Filtering calls using the voice mailbox p.8
- 1.8 Redialling p.8
- 1.9 Make a call-back request to a busy number p.8
- 1.10 Answering an internal call in intercom mode p.8
- 1.11 Sending DTMF signals p.9
- 1.12 Mute, so that your correspondent cannot hear you p.9

2.

During a conversation p.10

- 2.1 Making a second call during a conversation p.10
- 2.2 Answering a second call during a conversation p.10
- 2.3 Switching between calls (Broker call) p.10
- 2.4 Transferring a call p.10
- 2.5 Three-way conference with internal and/or external correspondents (conference) p.11
- 2.6 Placing a call on hold (hold) p.11
- 2.7 Placing an outside call on hold (parking) p.11
- 2.8 Intrusion into an internal conversation p.11
- 2.9 Store a number p.12
- 2.10 Adjust audio volume p.12

3.

Sharing p.13

- 3.1 Receiving supervised call ringing p.13
- 3.2 Answering the general bell p.13
- 3.3 Manager/secretary filtering p.13
- 3.4 Call pick-up p.13
- 3.5 Answering briefly in place of the operator p.13
- 3.6 Hunting groups p.14
- 3.7 Calling an internal correspondent on his/her pager p.14
- 3.8 Answering a call on your pager p.14
- 3.9 Calling a correspondent on his/her loudspeaker p.14
- 3.10 Sending a written message to an internal correspondent p.14
- 3.11 Send a voice message copy p.15
- 3.12 Sending a recorded message to a number / a distribution list p.16
- 3.13 Broadcasting a message on the loudspeakers of a station group p.16

4.

Keep in touch p.17

- 4.1 Selecting calls to be diverted p.17
- 4.2 Diverting calls to another number (immediate diversion) p.17
- 4.3 Diverting your calls to your voice message service p.17
- 4.4 When you return, consult recorded messages p.17
- 4.5 Activate/disable the personal assistant p.17
- 4.6 Personal assistant : reaching you with one number only p.18
- 4.7 Diverting calls to your pager p.18
- 4.8 Forwarding your calls from the receiving terminal ("Follow me") p.18
- 4.9 Applying a selective diversion p.18
- 4.10 Diverting all group calls p.18
- 4.11 Cancelling all diversions p.19
- 4.12 Diverting calls when your line is busy (divert if busy) p.19
- 4.13 Do not disturb p.19
- 4.14 Leaving a recorded message for internal callers p.19
- 4.15 Consulting written messages p.20
- 4.16 Message notification p.20

5.

Managing your charges p.21

- 5.1 Charging your calls directly to business accounts p.21
- 5.2 Finding out the cost of an outside call made for an internal user from your terminal ... p.21

6.

Programming your telephone p.22

- 6.1 Initializing your voice mailbox p.22
- 6.2 Customising your voice greeting p.22
- 6.3 Modifying your personal code p.22
- 6.4 Configuring the telephone ringer p.22
- 6.5 Adjusting screen brightness p.23
- 6.6 Selecting language p.23
- 6.7 Make a call using the personal phone book p.23
- 6.8 Programming direct call keys p.23
- 6.9 Programming an appointment reminder p.24
- 6.10 Identify the terminal you are on p.24
- 6.11 Broadcasting background music on your loudspeaker p.24
- 6.12 Lock / unlock your telephone p.24
- 6.13 Activating/deactivating "forced headset" mode p.25

Guarantee and clauses p.26

Getting to know your telephone

Handset

Alphanumeric keypad



Alcatel 4018

Audio keys



Hang-up key: to terminate a call.



Hands-free/Loudspeaker Key: to make or answer a call without lifting the receiver (Alcatel 4018).

- Lit in hands-free mode or headset mode (short press).
- Flashing in loudspeaker mode(long press).



Intercom/Mute key:

- During a conversation: press this key so that your correspondent can no longer hear you.
- Terminal idle: press this key to answer calls automatically without picking up the receiver.



To adjust the loudspeaker or handset volume up or down

Function keys



Messaging key to access various mail services:


if the key flashes, a new voice message or a new text message has been received.



'Redial' key :

- To access the 'Redial' function (short press)
- Call back on the last 10 number dialed (long press).

Navigation



Up-down navigator: used to navigate around the home page, through the menus or in a text zone when entering characters.

The home page consists of:

- Information on the status of the set (set locked, call forward, etc.),
- Date and time,
- Set programming and configuration functions.

Functions accessible (set in idle position):

Who am I	Identify the terminal you are on,
RedialList	Call back on the last 10 number dialed,
Lock	Lock / unlock your telephone,
Appointment	Programming an appointment reminder,
Forward	Divert your calls to another number. (immediate forwarding, forward to voice mail, forward to bleeper),
Settings	Configure the set (personal assistant, display, ring tone, voice mail, etc.),
Dial by name	Using call by name.

Features accessible in conversation:

Hold	Placing a call on hold (hold),
MFcode	Sending DTMF signals,
Savetorep	Store the number in the personal phone book,
Dial by name	Call a second correspondent using call by name.

Other features can be accessed depending on the configuration of the system.



OK key: used to validate your choices and options while programming or configuring.



Back/Exit key: to return to previous menu (short press) or return to first screen (long press). You can also use this key to correct a character you entered.

Function keys and programmable keys



Guide key: use to obtain information on the pre-programmed keys or to access the set programming or configuration.



Phone book key: phone book key to access your personal phone book (short press) or to make a call by name (long press or press twice).



Pre-programmed function keys and programmable key:


Lit when the function associated with the key is activated.

The 6-key block consists of:

- two line keys,
- one 'immediate forwarding or cancel call-forward' key,
- one 'conference' key,
- one 'transfer' key,
- one direct call key to programme.

1 Using your telephone

1.1 Making a call

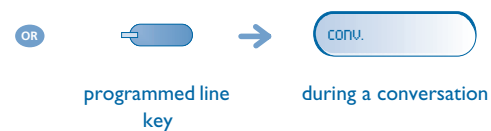

To make an external call, dial the outside line access code before dialling your correspondent's number. 9 is the default code for an outside line.


For the operator, dial '0' (by default).

1.2 Receiving a call



1.3 Using the telephone in 'Hands free' mode (Alcatel 4018 only)

■ Terminal idle:

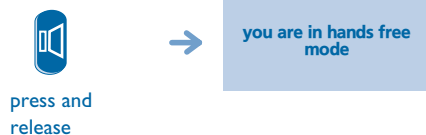

■ Call in progress:



During a conversation, you can lift the receiver without terminating the call.

1.4 Activating the loudspeaker during a conversation (receiver lifted) - Loudspeaker



press and release the loudspeaker key to switch to hands free mode (light steady).


1.5 Calling your correspondent by name (company directory)



You enter your contact's name in predictive text mode. In this mode, enter each letter of the name by pressing only once on the key with this letter.

Using your telephone

1.6 Make a call using the personal phone book

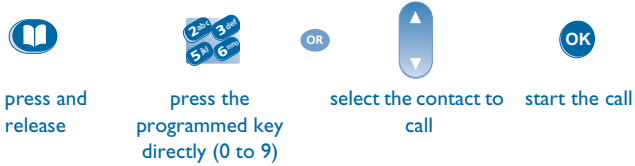


1.7 Filtering calls using the voice mailbox (Alcatel 4018 only)

This service lets you filter incoming calls to your voice mailbox. When your caller leaves his message you can choose to communicate with him.

• Activating call screening:




• When you receive a call:

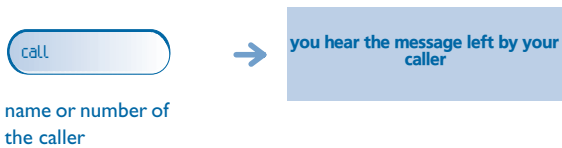


1.8 Redialling

- Redialling the last number dialled (redial):

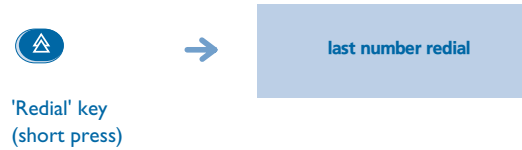

- Call back on the last 10 number dialled:

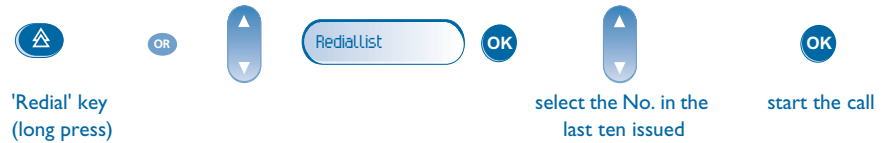

1.9 Make a call-back request to a busy number



1.10 Answering an internal call in intercom mode (Alcatel 4018 only)

You can answer without lifting the receiver. When you receive an internal call, your telephone rings and you are connected directly in hands free mode. The screen shows the caller's identity.

- To activate - Terminal idle:



When your caller hangs up, intercom mode remains active.

Using your telephone

- To deactivate - Terminal idle:



1.11 Sending DTMF signals

During a conversation you sometimes have to send DTMF signals, such as with a voice server, an automated attendant or a remotely consulted answering machine.



during a conversation

to activate

 *The function is automatically cancelled when you hang up.*

1.12 Mute, so that your correspondent cannot hear you

You can hear your correspondent but he/she cannot hear you:



during a conversation

disable microphone



resume the conversation

2

During a conversation

2.1 Making a second call during a conversation



during a conversation

number of second correspondent

call back the last number dialed. (short press)

the first call is on hold

• Other methods for calling a second correspondent

Call back on the last 10 number dialed (long press).

Calling from your personal directory (PersSpDial) (long press or press twice).

OR Using call by name.

Programmed line key.

• To cancel your second call and recover the first:




during a conversation

key for the line whose light is flashing

If you make an error, hang up: your telephone will ring and you will recover your first call.

2.2 Answering a second call during a conversation

• A second correspondent is trying to call you:



during a conversation

name or no. of the caller displayed for 3 seconds

light flashes

■ Answer call displayed:



line key for which icon is flashing

• To return to your first caller and end the conversation in progress:



during a conversation

key associated with the 'incoming call' icon

2.3 Switching between calls (Broker call)

During a conversation, a second call is on hold. To accept the second call:



light flashes

2.4 Transferring a call

• To transfer your call to another number:



during a conversation

no. of the 2nd terminal

the first call is on hold

• If the number receiving the transfer answers:



'transfer' programmed key

You can also transfer your call immediately, without waiting for the number to answer, using either of the two methods described above.

Transfer between two outside calls is not generally possible (depends on country concerned and system configuration).

During a conversation

2.5 Three-way conference with internal and/or external correspondents (conference)

- During a conversation, a second call is on hold:



during a conversation **“Conference”** programmed key

- Cancel the conference and remain with your second correspondent (your first call is placed on hold):



“Conference” programmed key

- Hang up on all correspondent:



- After the conference, to leave your two correspondents talking together:



cancel the conference **'transfer'** programmed key

2.6 Placing a call on hold (hold)

- **Exclusive hold:**

During a conversation, you wish to place the call on hold and recover it later, on the same telephone.



during a conversation


- **Recover the call on hold:**



key for the line whose light is flashing

2.7 Placing an outside call on hold (parking)

You can place an outside call on hold and recover the call on another telephone:



during a conversation

- **To recover the parked call:**



number of telephone from which call was parked

If the parked call is not recovered within a preset time (default value 1 min 30), it is transferred to the operator.

2.8 Intrusion into an internal conversation


Your correspondent's line is busy. If the number is not "protected" and if authorised, you can intrude into the call:



'Intrude on a call' programmed key

During a conversation

• Protection against intrusion:

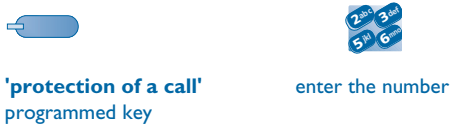

Protection is cancelled when you hang up.

2.9 Store a number

During a call, to save the number onto a call key:



* enter the name of your correspondent :

Enter the text: the number pad keys have letters that you can display by successive presses.

Position the cursor in the entry field.

Erase last character entered.

Enter a digit (keys 0 to 9).

2.10 Adjust audio volume

During a call, to adjust the volume level of the loudspeaker or receiver:



3.1 Receiving supervised call ringing

To receive the special ringing for calls to another number:



3.2 Answering the general bell


When the operator is absent, outside calls to the operator are indicated by a general bell. To answer:



3.3 Manager/secretary filtering

System configuration allows “manager/secretary” groups to be formed, so that the manager’s calls can be directed to one or more secretaries.

- From the manager’s or secretary’s telephone:

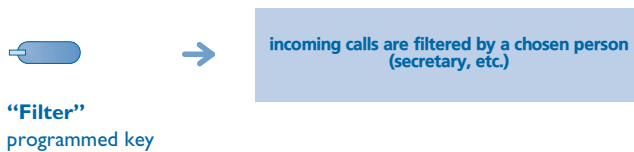

Filtering is indicated on the manager’s telephone by the icon corresponding to the “filtering” programmed key.

3.4 Call pick-up


You hear a telephone ringing in an office where no-one can answer. If authorised, you can answer the call on your own telephone.

- If the telephone ringing is in your own pick-up group:



‘group call pick-up’ programmed key


- If the telephone ringing is not in your pick-up group:

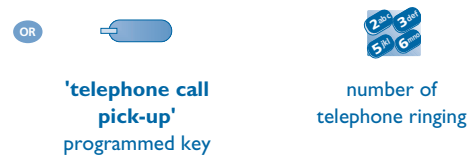

The system can be configured to prevent call pick-up on certain telephones.

3.5 Answering briefly in place of the operator

Outside calls to the operator will ring on your telephone and you can answer the call:

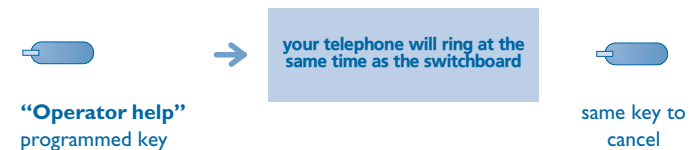

Sharing

• Calls to the switchboard:




3.6 Hunting groups

• Hunting group call:

Certain numbers can form a hunting group and can be called by dialling the group number.





• Temporary exit from your hunting group:/Return into your group:

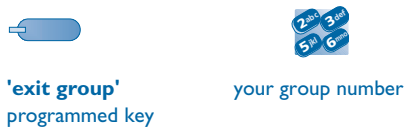

Belonging to a group does not affect the management of direct calls. A specific telephone within a group can always be called by using its own number.

3.7 Calling an internal correspondent on his/her pager


The number called does not answer and you know that the person called has a pager:

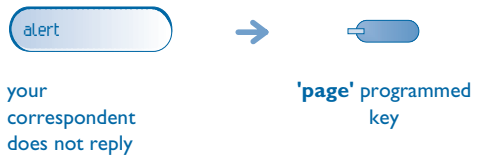

Your correspondent can answer from any telephone in the system.

3.8 Answering a call on your pager

A call on your pager can be answered from any telephone within the system.

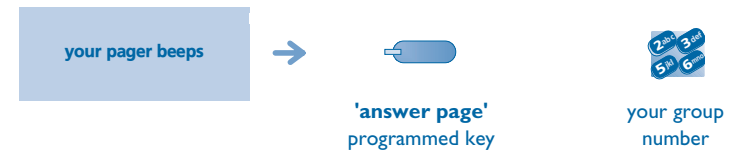

3.9 Calling a correspondent on his/her loudspeaker

Your internal correspondent does not answer. If authorised, you can remotely activate your correspondent's phone:



3.10 Sending a written message to an internal correspondent



Sharing

• Predefined message:

select the message to be sent

enter the no. of the message to be sent (01 to 27)

apply your choice

change language of message

send message

• Personal message:

create a temporary personal message*

send message

*Create a temporary personal message:

Enter the text: the number pad keys have letters that you can display by successive presses.

Position the cursor in the entry field.

Erase last character entered.

Enter a digit (keys 0 to 9).

• The 27 standard messages are shown below:

1	Call me back	15	Meeting on ___ (*)
2	Call me back tomorrow	16	Meeting on ___ at _:_* (*)
3	Call me back at _:_* (*)	17	Out for a while
4	Call back ___ (*)	18	Absent for the rest of the day
5	Call the attendant	19	Absent, back at _:_* (*)
6	Call the secretary	20	Absent, back on ___ at _:_* (*)
7	I will call back at _:_* (*)	21	On vacation, back on ___ (*)
8	Use paging	22	External meeting
9	Please fetch your fax	23	External meeting, back on ___ (*)
10	Please fetch your mail	24	I am in room nr ___ (*)
11	Please cancel your forwarding	25	In a meeting - do not disturb
12	Visitors are waiting	26	At lunch
13	You are expected at reception	27	Indisposed

14 Meeting at _:_* (*) (*) Messages to be completed using numeric keypad

3.11 Send a voice message copy

personal code

display number of new and old messages

select message to copy by consecutive presses

number to be called

send message

record a comment*

add a correspondent

send message

• * To record a comment:

start recording the comment

recording


end of recording

replay comment

re-record a comment


send message

3.12 Sending a recorded message to a number / a distribution list

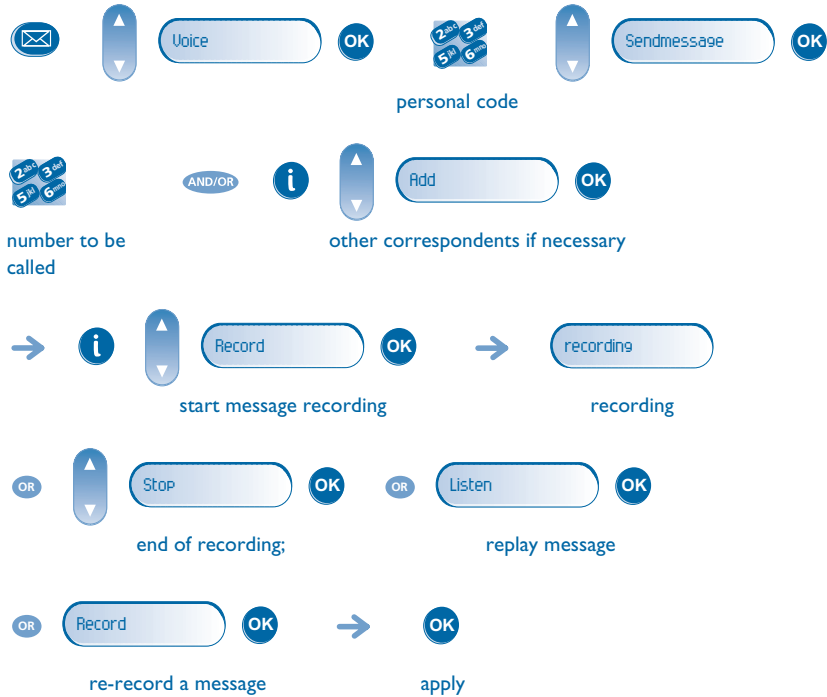

3.13 Broadcasting a message on the loudspeakers of a station group

A message not requiring an answer can be broadcast on the loudspeakers within your broadcast group:

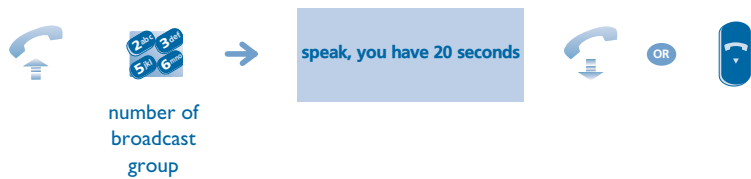


The message will only be broadcast on terminals not in use and which have a loudspeaker.

4

Keep in touch


4.1 Selecting calls to be diverted

When a diversion is applied, you can select the types of call to be diverted: outside, internal, all.

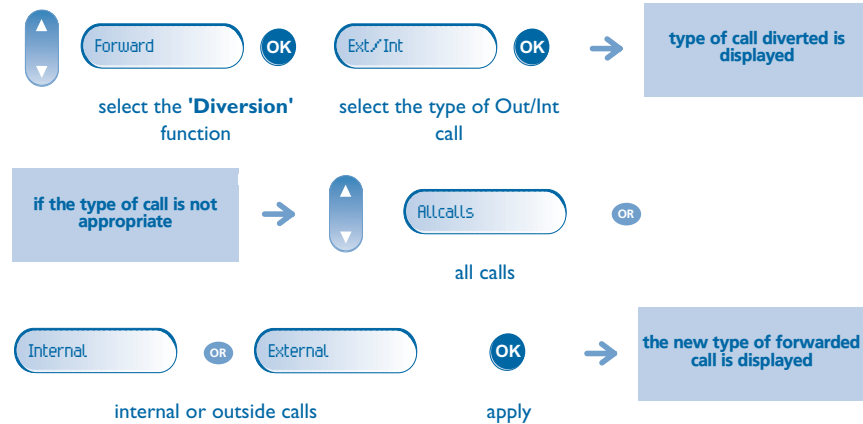

4.2 Diverting calls to another number (immediate diversion)

The number can be your home, portable or car phone, voice message or an internal extension (operator, etc.).

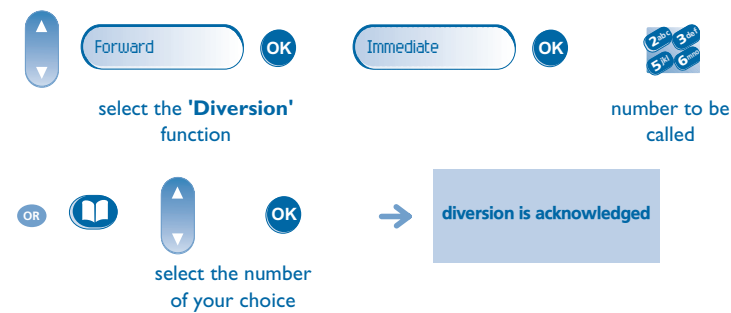


You can make calls, but only the destination number can call you.

4.3 Diverting your calls to your voice message service




4.4 When you return, consult recorded messages

The light indicates that messages have been received.


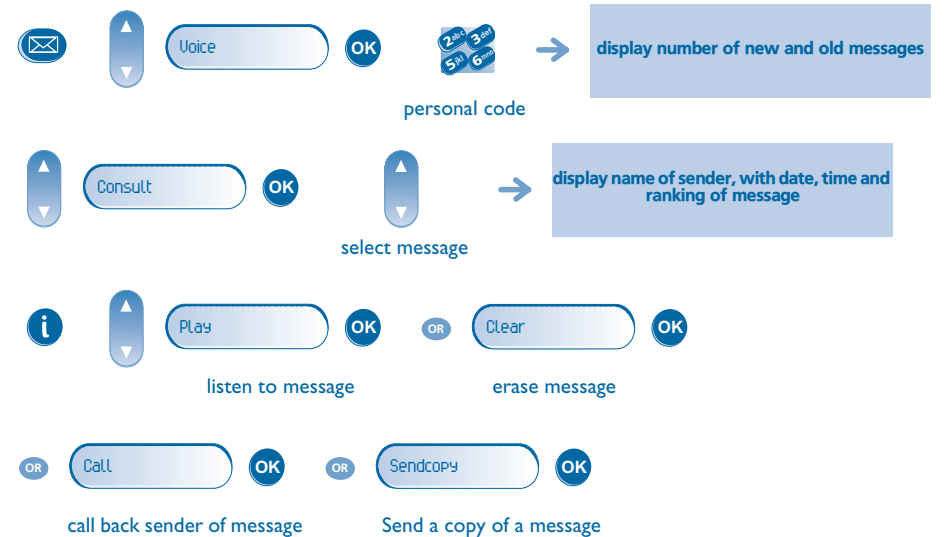


4.5 Activate/disable the personal assistant

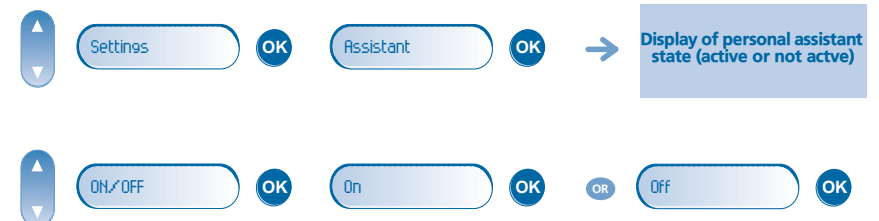


Keep in touch

4.6 Personal assistant: reaching you with one number only

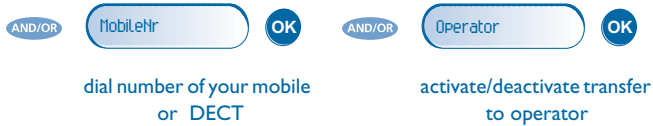

4.7 Diverting calls to your pager

Callers will thus be able to contact you while you are moving around the company:

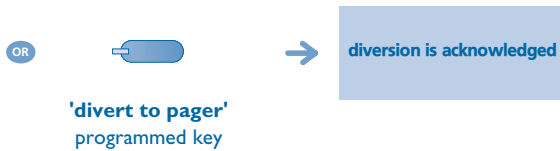


4.8 Forwarding your calls from the receiving terminal ("Follow me")

You wish to receive your calls in your present location:
Use the "Follow me" function.



4.9 Applying a selective diversion

You can selectively divert calls, according to the caller's identity:

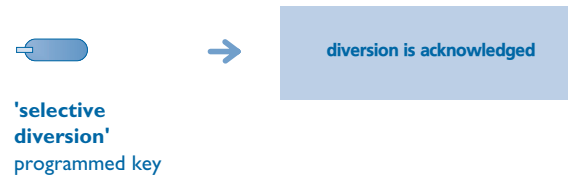

4.10 Diverting all group calls

You can divert all your group calls to another internal number:




Keep in touch

4.11 Cancelling all diversions




4.12 Diverting calls when your line is busy (divert if busy)

Callers can be diverted to another telephone if you are already on the line.

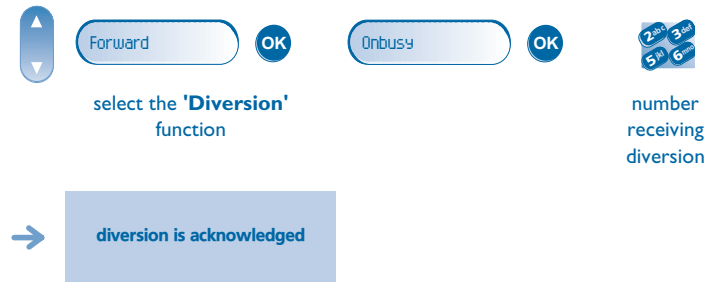

4.13 Do not disturb



You can make your terminal temporarily unavailable for all calls.

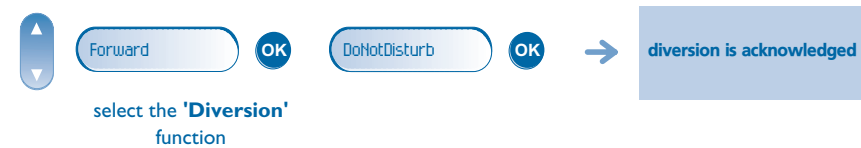


Callers wishing to contact you will see the 'Do Not Disturb' message displayed on their sets when they try to call.

4.14 Leaving a recorded message for internal callers

You can leave a message on your terminal which will be displayed on the screen of the terminal calling you.

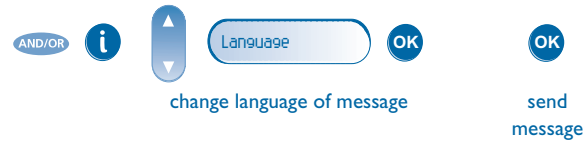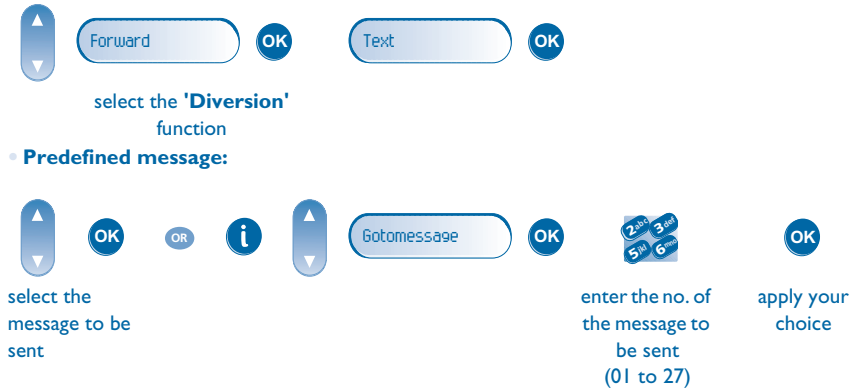

• Personal message:

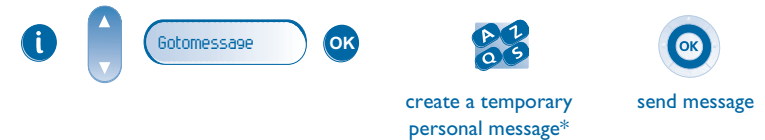

*Create a temporary personal message:








Keep in touch

• The 27 standard messages are shown below:


1	Call me back	15	Meeting on ___ (*)
2	Call me back tomorrow	16	Meeting on ___ at ___:___ (*)
3	Call me back at ___:___ (*)	17	Out for a while
4	Call back ___ (*)	18	Absent for the rest of the day
5	Call the attendant	19	Absent, back at ___:___ (*)
6	Call the secretary	20	Absent, back on ___ at ___:___ (*)
7	I will call back at ___:___ (*)	21	On vacation, back on ___ (*)
8	Use paging	22	External meeting
9	Please fetch your fax	23	External meeting, back on ___ (*)
10	Please fetch your mail	24	I am in room nr ___ (*)
11	Please cancel your forwarding	25	In a meeting - do not disturb
12	Visitors are waiting	26	At lunch
13	You are expected at reception	27	Indisposed
14	Meeting at ___:___ (*)	(*)	Messages to be completed using numeric keypad

During consultation of a message, pressing the 'i' key provides access to the following functions ():




-  Erase message.
-  Call back sender of message.
-  Sending a written message to an internal correspondent.
-  Save the sender's number in your directory.
-  Terminate consultation.

4.15 Consulting written messages

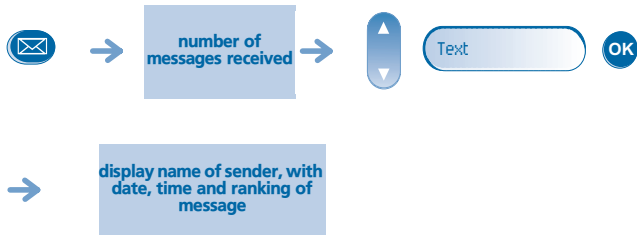The light indicates that messages have been received.



During the display of the information:

-  Call back the message sender (the message is erased automatically after the call).
-  Next message.
-  Previous message.

4.16 Message notification

A message is left in your mailbox but you are not at your desk. You can configure your telephone so that you receive notification of the message on another telephone.



• **Activate/deactivate message notification:**



• **Enter the number of the set where the notification is to be received:**



• **Change the time slot:**

The time slot during which notification is activated can be changed.



5 Managing your charges

5.1 Charging your calls directly to business accounts

You can charge the cost of your outside calls to business account numbers.



“Business account code” programmed key



enter the number of the terminal to receive the message



password for this internal telephone



enter number for correspondent

- Adding or changing a business code during a call:



“Business account code during call” programmed key

5.2 Finding out the cost of an outside call made for an internal user from your terminal



the call is placed on hold

programmed key 'Meter Total Recall'



outside number called



OR



transfer call to your correspondent on hold


- At the end of the call, you are called back and you can:

1. Read information concerning call (cost, duration, number of units...).



name of internal user and cost of call

2. Print a charge ticket.



3. Terminate consultation.



6 Programming your telephone

6.1 Initializing your voice mailbox

light flashes  enter your personal code then record your name according to voice guide instructions

 Your personal code is used to access your voice mailbox and to lock your telephone.

6.2 Customising your voice greeting

You can replace the greeting message by a personal message

 Settings  Mailbox  Persmessage 

→ 

recording

During consultation of a message, pressing the 'i' key provides access to the following functions: ()

 To stop the recording.

 To pause recording.

 To record the message again.

6.3 Modifying your personal code

Your personal code is used to access your voice mailbox and to lock your telephone.

 Settings  My options  Password 




old code
(4 digits)



new code
(4 digits)



display requests
confirmation of new
password

 As long as your voice mailbox has not been initialized, personal code is 1515.

6.4 Configuring the telephone ringer

 Settings  My phone  Ringing 

▼ Choose the tune:


 Melody 

select the melody of
your choice (16 tunes)


apply your choice

▼ Adjusting the ringer volume:

 Volume 


select the volume of your
choice
(12 levels)


apply your choice

Programming your telephone


▼ Activate/disable meeting mode (progressive ringing):




▼ Activate/deactivate discreet ring mode:



▼ Adjust ringer volume while a call arrives:

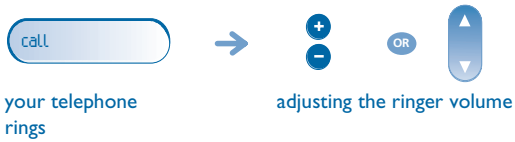

6.5 Adjusting screen brightness




6.6 Selecting language




6.7 Make a call using the personal phone book



* Enter the name :



6.8 Programming direct call keys

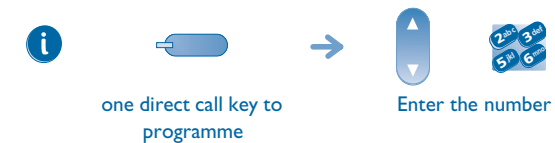


Programming your telephone


6.9 Programming an appointment reminder

You can define the time of a temporary reminder (one in 24 hours) or a permanent reminder (every day at the same time).

• Program a temporary reminder call:

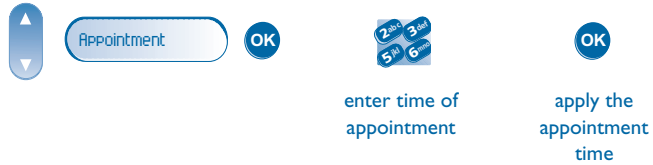

• Program a permanent reminder call:

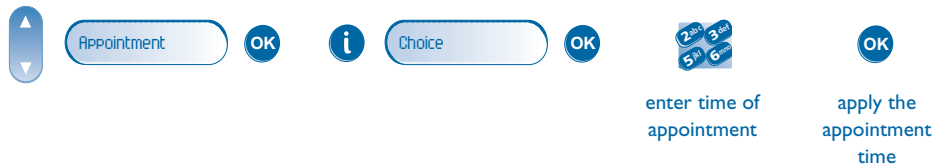

• At the programmed time, your telephone rings:



*If you are in conversation, the display flashes and an audio tone is generated. After three calls without reply, a temporary request is cancelled but a permanent request remains in memory.
If your calls are diverted to another terminal, the diversion is not applied to the reminder call.*

• To cancel your temporary reminder call request:



• To cancel your permanent reminder call request:



6.10 Identify the terminal you are on



press twice


6.11 Broadcasting background music on your loudspeaker

You can broadcast background music on the loudspeaker of your telephone (depending on configuration):




The music stops when a call is made or received and starts again when you hang up.

6.12 Lock / unlock your telephone

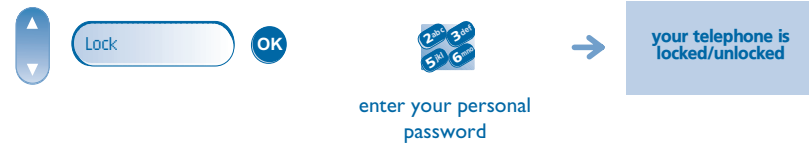

6.13 Activating/deactivating 'forced headset' mode

'Forced headset' mode must be activated as soon as a headset is installed instead of the receiver.;

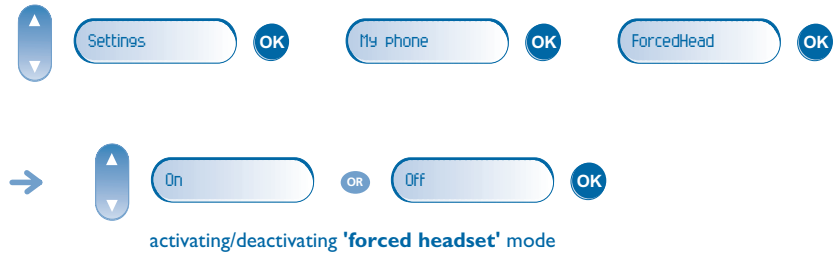

Guarantee and clauses

Independently of the legal warranty that covers this appliance, it is guaranteed for 1 year, parts and labour, counting from the date indicated on your invoice.

The invoice will be demanded if making a claim under the warranty. The warranty does not however apply in the following cases: in the event of use that does not comply with the instructions given in this user's manual, faults or damage caused by natural wear, damage resulting from a cause external to the appliance (e.g. impact, fall, exposure to dampness, etc.), noncompliant installation or modifications or repairs carried out by people who are not approved by the manufacturer or retailer.

Warning: never place your telephone in contact with water. To clean your telephone, you may however use a damp soft cloth. Never use solvents (trichlorethylene, acetone, etc.) which may damage the plastic parts of your telephone. Never spray it with cleaning products.

Earpiece may retain magnetic objects.

The wording is not contractual and may be subject to change. Some functions of your telephone are controlled by a software key and the configuration of the unit.

Declaration of compliance

EC: We, Alcatel Business Systems, hereby declare that we assume the Alcatel 4018 or 4019 product to be compliant with the essential requirements of Directive 1999/5/CE of the European Parliament and Council. A copy of the original of this declaration of compliance can be obtained from your installer.

Alcatel Business Systems, in keeping with its policy of constant product improvement for the customer, reserves the right to modify product specifications without prior notice. Copyright © Alcatel Business Systems. 2005. All rights reserved.

MUI9002BSAA-O400ed01-I105